



*"Simply Better"*

SKIRTEC GROUP PTY LTD  
ABN 77 074 107 805  
Head Office Contact:  
TEL 07 3375 6144  
FAX 07 3375 6033  
Email sales@skirtec.com.au

## C15035 SKIRTING DUCT

3 Channel Aluminium Base and Cover 150mm X 35mm.


**FREECALL 1800 064 435**

INTRODUCING

ANOTHER

*"Simply Better"*

ECONOMICAL  
SKIRTING DUCT  
PRODUCT

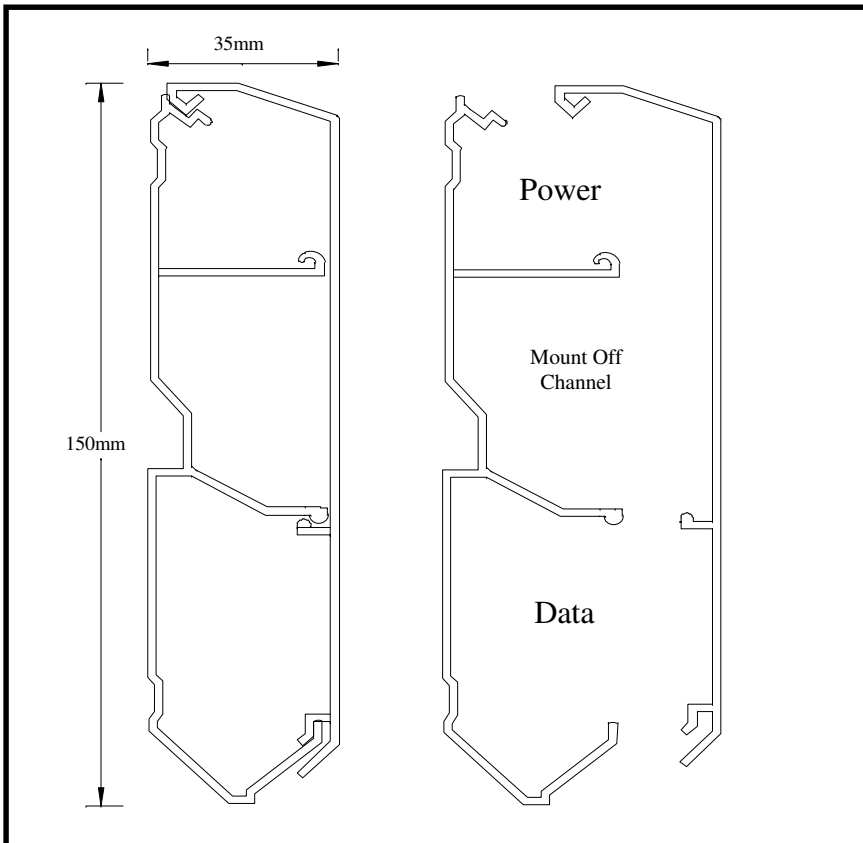

- \* CENTREMOUNT  
OUTLET KITS
- \* POWDERCOATED  
OR  
CLEAR ANODISED
- \* REFURBISH BY  
COVER CHANGE  
ONLY!

### DIMENSIONS

**Profile: 150mm X 35mm**

**Lengths: Base 3 metre**

**Cover 1.8 metre**

**Single outlet cover 160mm**

**Double outlet cover 295mm**

**Triple outlet cover 430mm**

Indicative cable capacity:

- up to 30 data/tele. & up to 7 power cables

\* Outlet kits to suit 84 mm mounting centres.

CAT No	Description
C15035BC	Skirting duct base & cover, per Metre
C15035IC	Modular internal corner
C15035EC	Modular external corner
C15035ES	End Stop, left or right
C15035SO	Single outlet kit* - suit 1 grid plate (GPO/Data/Tele.)
C15035DO	Double outlet kit* - suit 2 grid plates (GPO/Data/Tele.)
C15035TO	Triple outlet kit* - suit 3 grid plates (GPO/Data/Tele.)
Std Colours	Black & clear anodised, other colours available.

### SUGGESTED SPECIFICATIONS

The Contractor shall install a 3 Channel Skirting Duct System, SKIRTEC C15035, as indicated on the tender drawings.

Both power and communications outlets shall fit off in the centre channel, in line. Outlet kits shall provide for single, double and triple plates and suit all standard grid plates.

90 degree corners shall be factory made and modular.

The duct system shall be installed in accordance with the manufacturer's instructions and base sections shall be fixed to the walls at intervals no more than 900mm.

**COLOURS AVAILABLE, FULL POWDER COAT RANGE AND ANODISED.**