



"Simply Better"

SKIRTEC GROUP PTY LTD
ABN 77 074 107 805
Head Office Contact:
TEL 07 3375 6144
FAX 07 3375 6033
Email sales@skirtec.com.au

C15050 SKIRTING DUCT

FREECALL 1800 064 435


3 Channel Aluminium Base and Cover 150mm X 50mm.

INTRODUCING

ANOTHER

"Simply Better"

ECONOMICAL
SKIRTING DUCT
PRODUCT

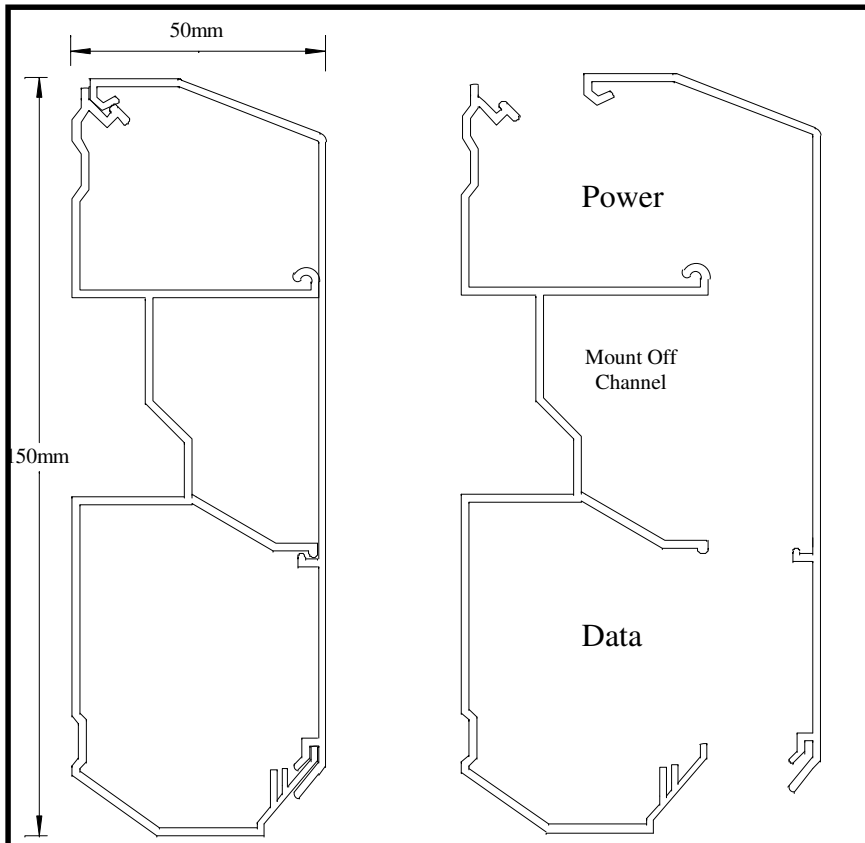

- * CENTREMOUNT OUTLET KITS
- * POWDERCOATED OR CLEAR ANODISED
- * REFURBISH BY COVER CHANGE ONLY!

DIMENSIONS

Profile: 150mm X 50mm
Lengths: Base 3 metre
Cover 1.8 metre

Single outlet cover 160mm

Double outlet cover 295mm

Triple outlet cover 430mm

Indicative cable capacity:

- up to 40 data/tele. & up to 10 power cables

* Outlet kits to suit 84 mm mounting centres.

CAT No	Description
C15050BC	Skirting duct base & cover, per Metre
C15050IC	Modular internal corner
C15050EC	Modular external corner
C15050ES	End Stop, left or right
C15050SO	Single outlet kit* - suit 1 grid plate (GPO/Data/Tele.)
C15050DO	Double outlet kit* - suit 2 grid plates (GPO/Data/Tele.)
C15050TO	Triple outlet kit* - suit 3 grid plates (GPO/Data/Tele.)
Std Colours	Black & clear anodised, other colours available.

SUGGESTED SPECIFICATIONS

The Contractor shall install a 3 Channel Skirting Duct System, SKIRTEC C15050, as indicated on the tender drawings.

Both power and communications outlets shall fit off in the centre channel, in line. Outlet kits shall provide for single, double and triple plates and suit all standard grid plates.

90 degree corners shall be factory made and modular.

The duct system shall be installed in accordance with the manufacturer's instructions and base sections shall be fixed to the walls at intervals no more than 900mm.

COLOURS AVAILABLE, FULL POWDER COAT RANGE AND ANODISED.