



*"Simply Better"*  
ABN 77 074 107 805


SKIRTEC GROUP PTY LTD  
ABN 77 074 107 805  
TEL 07 3375 6144 & 02 9674 9080  
FAX 07 3375 6033 & 02 9674 9081  
Email brisbaneoffice@skirtec.com.au  
& sydneyoffice@skirtec.com.au

## ASC CENTREPOINT BOLLARDS

**FREECALL 1800 064 435**

[www.skirtec.com.au](http://www.skirtec.com.au)

2 Channel Extruded Aluminium Bollards, Fully Modular 100mm X 50mm

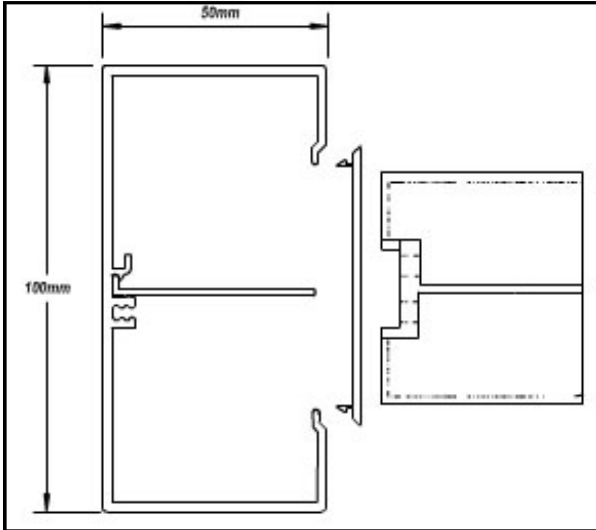

### DIMENSIONS

Profile: 100mm X 50mm

Length: 300mm, 600mm & Customised

Bollards are complete with required outlet mount kits + floor mount bracket, all pre-installed, + cover strips and top end cap!

Customized bollards are configured to exact requirements in length, outlet mount kits and layout.

All bollards are treated a special manufacture and as such are non-returnable!

Power/Data Grid  
Plates not provided!



### *"Simply Better"* OPTIONS IN SKIRTEC'S COMPLETE CENTREPOINT BOLLARD RANGE.

- EXTRUDED ALUMINIUM BODY AND LID
- SECURE CLIP-IN COVER WITH FULL FRONT ACCESS
- POWDERCOATED OR CLEAR ANODISED (full powder coat range available)
- FULLY MODULAR AND SUPPLIED WITH PRE-INSTALLED UNIVERSAL OUTLET MOUNT KITS (84mm mounting centres)
- JUST ADD GRID PLATES
- PRE SET-UP WITH FLOOR MOUNTING BRACKETS AND TOP END CAP
- CABLE CAPACITY INDICATIONS; 7 POWER & 25 DATA (15 CAT 6A) (+40% air space)
- DESIGNED AND PACKAGED FOR EASE OF INSTALLATION AND QUALITY FINISH

CAT No	Description
Bollard-2G	Centrepoint Bollard 2Grid Plates 300mm
Bollard-4G	Centrepoint Bollard 4Grid Plates 600mm
Bollard-SP	Centrepoint Bollard Customised
Stock Colours	Clear Anodised, Black, White Birch, Pearl White & Soft Grey
Set Up	Powdercoat fee for special colours.

### SUGGESTED SPECIFICATIONS

- The Contractor shall install a 2 Channel Bollard, **SKIRTEC CENTREPOINT BOLLARD**, as indicated on the tender drawings.
- Outlets shall be mounted on one side of the duct with no visible cover joins adjacent. The bollard shall be powdercoated or anodised.
- Power and Data plates shall be mounted by way of Skirtec manufactured mount kits (pre-installed) and secured into the dedicated screw channel.
- The Contractor shall install the duct in accordance with Skirtec Installation Instructions and comply with all current Australian Standards and ACMA wiring rules (cabling, earthing and terminations).