



*"Simply Better"*

ABN 77 074 107 805


SKIRTEC GROUP PTY LTD  
ABN 77 074 107 805  
TEL 07 3375 6144 & 02 9674 9080  
FAX 07 3375 6033 & 02 9674 9081  
Email [brisbaneoffice@skirtec.com.au](mailto:brisbaneoffice@skirtec.com.au)  
& [sydneyoffice@skirtec.com.au](mailto:sydneyoffice@skirtec.com.au)

**FREECALL 1800 064 435**

[www.skirtec.com.au](http://www.skirtec.com.au)

## C15050 SKIRTING DUCT

3 Channel Aluminium Base and Cover 150mm X 50mm.

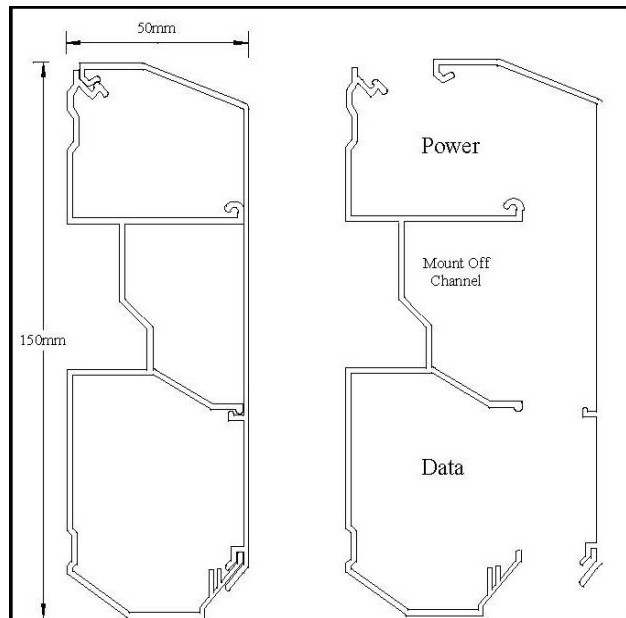

### DIMENSIONS

Profile: 150mm X 50mm

Lengths: Base 3 metre

Cover 1.8 metre

Single outlet cover 155mm

Double outlet cover 295mm

Triple outlet cover 435mm



*"Simply Better"* OPTIONS IN SKIRTEC'S WHOLE OF LIFE VALUE SKIRTING DUCT RANGE

- EXTRUDED ALUMINIUM BASE AND COVER
- SECURE CLIP OVER COVER SYSTEM
- COVERS POWDERCOATED OR CLEAR ANODISED (full powder coat range available)
- CENTREMOUNTING UNIVERSAL OUTLET MOUNT KITS (84mm mounting centres)
- MODULAR CORNERS AND ENDS
- REFURBISHMENT BY COVER CHANGE ONLY
- CABLE CAPACITY INDICATIONS; 10 POWER & 40 DATA (24 CAT 6A)(+40% air space)
- EASY INSTALLATION AND MITRE CUTTING NOT NECESSARY WHEN USING SKIRTEC CORNERS

CAT No	Description
C15050BC	Skirting duct base & cover, per Metre*
C15050IC	Modular internal corner
C15050EC	Modular external corner
C15050ES	End Stop, left or right
C15050SO	Single outlet kit - suit 1 grid plate (GPO/Data/Tele.)
C15050DO	Double outlet kit - suit 2 grid plates (GPO/Data/Tele.)
C15050TO	Triple outlet kit - suit 3 grid plates (GPO/Data/Tele.)
Std Colours	Black, Pearl White & Clear Ano (request specials).

\*This product Cat No is priced per metre for the base and cover sections combined. However, this product is supplied and invoiced in multiples of the standard length of a base section (3 mtr).

### SUGGESTED SPECIFICATIONS

- The Contractor shall install an Aluminium 3 Channel Skirting Duct System, SKIRTEC C15050, with a clip over tool removable cover system, as indicated on the tender drawings.
- Base sections shall be fixed to the walls at intervals of no more than 900mm and adjacent lengths of the duct base shall be joined by way of an alignment /earthing continuity rod (supplied).
- Power and Data plates shall be mounted by way of Skirtec manufactured mount kits, in-line and secured into the dedicated centre mounting channel. Outlet kits shall allow for the mounting of standard grid plates in 1, 2 & 3 plate combinations.
- 90 degree corners shall be factory made and modular or site mitred and end stops fitted as necessary.
- The Contractor shall install the duct in accordance with Skirtec Installation Instructions and comply with all current Australian Standards and ACMA wiring rules (cabling, earthing and terminations).