



"Simply Better"

SKIRTEC GROUP PTY LTD
 ABN 77 074 107 805
 Head Office Contact:
 TEL 07 3375 6144
 FAX 07 3375 6033
 Email sales@skirtec.com.au

FREECALL 1800 064 435

D15050 SKIRTING DUCT


2 Channel Aluminium Base and Cover 150mm X 50mm.

INTRODUCING

ANOTHER

"Simply Better"

ECONOMICAL
 SKIRTING DUCT
 PRODUCT

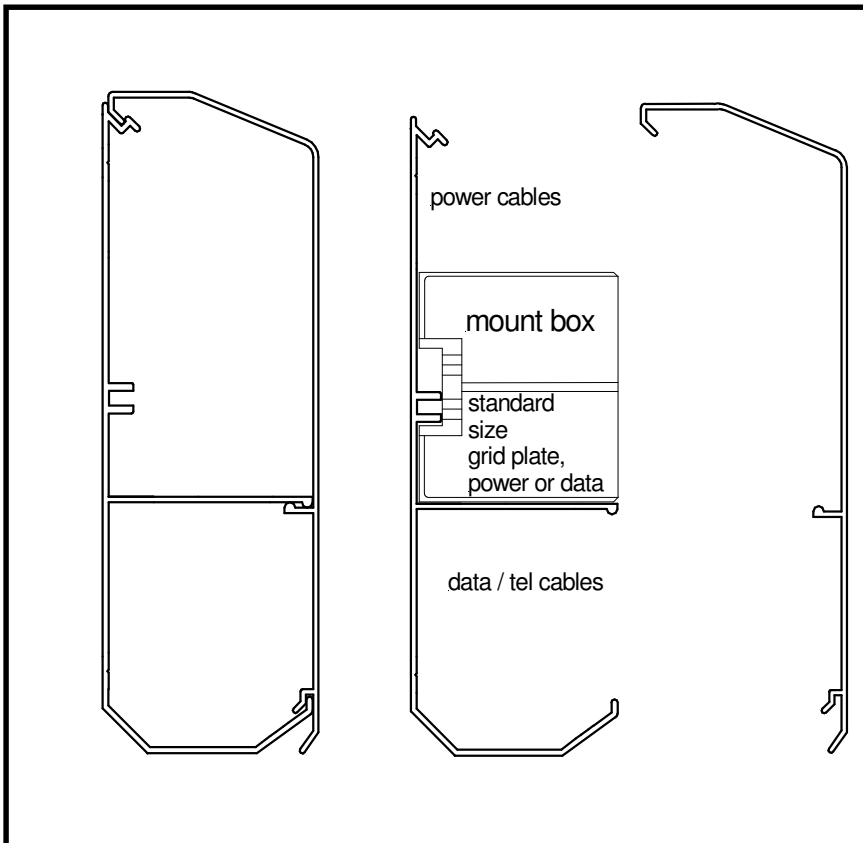

- * CENTREMOUNT
OUTLET KITS
- * POWDERCOATED
OR
CLEAR ANODISED
- * SUITABLE FOR
CAT 6 CABLING

DIMENSIONS

Profile: 150mm X 50mm

Lengths: Base 3 metre

Cover 1.8 metre

Single outlet cover 160mm

Double outlet cover 295mm

Triple outlet cover 430mm

Indicative cable capacity (inc. CAT6):

- up to 40 data/tele. & up to 10 power cables

* Outlet kits to suit 84 mm mounting centres.

CAT No Description

D15050BC Skirting duct base & cover, per Metre

D15050IC Modular internal corner

D15050EC Modular external corner

D15050ES End Stop, left or right

D15050SO Single outlet kit* - suit 1 grid plate (GPO/Data/Tele.)

D15050DO Double outlet kit* - suit 2 grid plates (GPO/Data/Tele.)

D15050TO Triple outlet kit* - suit 3 grid plates (GPO/Data/Tele.)

Std Colours Black & clear anodised, other colours available.

SUGGESTED SPECIFICATIONS

The Contractor shall install a 2 Channel Skirting Duct System, SKIRTEC D15050, as indicated on the tender drawings.

Both power and communications outlets shall fit off in the centre of the duct in line. Outlet kits shall provide for single, double and triple plates and suit all standard grid plates.

90 degree corners shall be factory made and modular.

The duct system shall be installed in accordance with the manufacturer's instructions and base sections shall be fixed to the walls at intervals no more than 900mm.

COLOURS AVAILABLE, FULL POWDER COAT RANGE AND ANODISED.